


WC

PRODUCT NOMENCLATURE

100	WC	100	15	7.5
Outlet Size (mm)	Pump Type	Rated Flow (m³/h)	Rated Head (m)	Power (kW)


RANGE CHARACTERISTICS

Power	0.75-7.5kW
Poles	2
Discharge	DN50 - 100
Max flow rate	130 m³/h
Max head	35 m

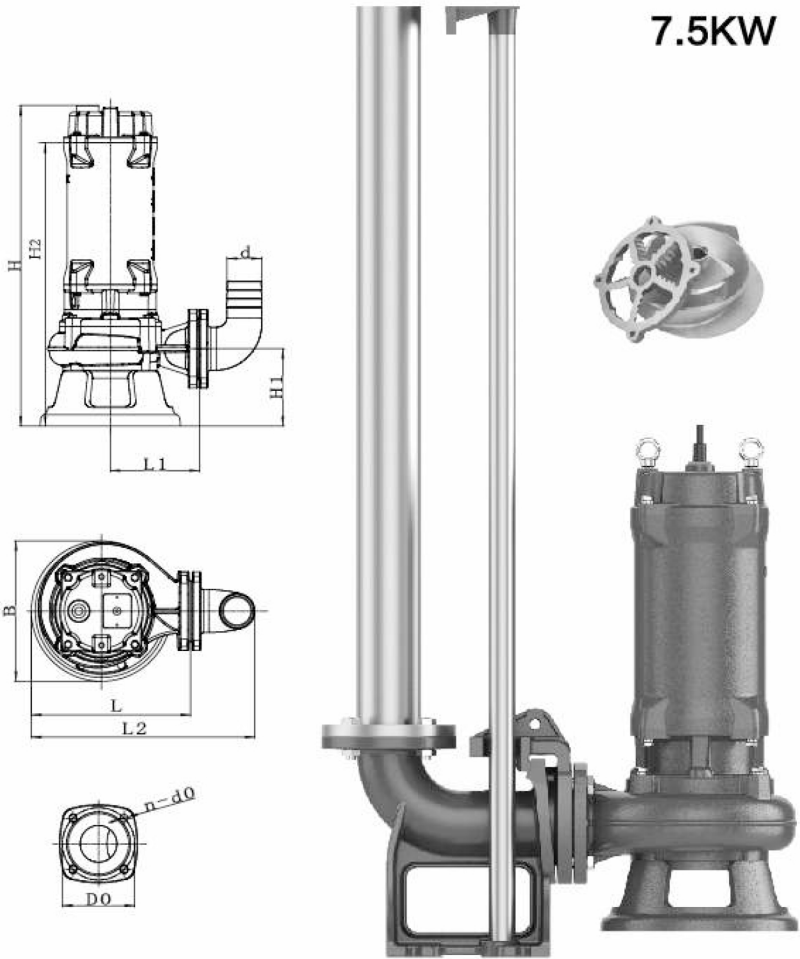

7.5KW

WC

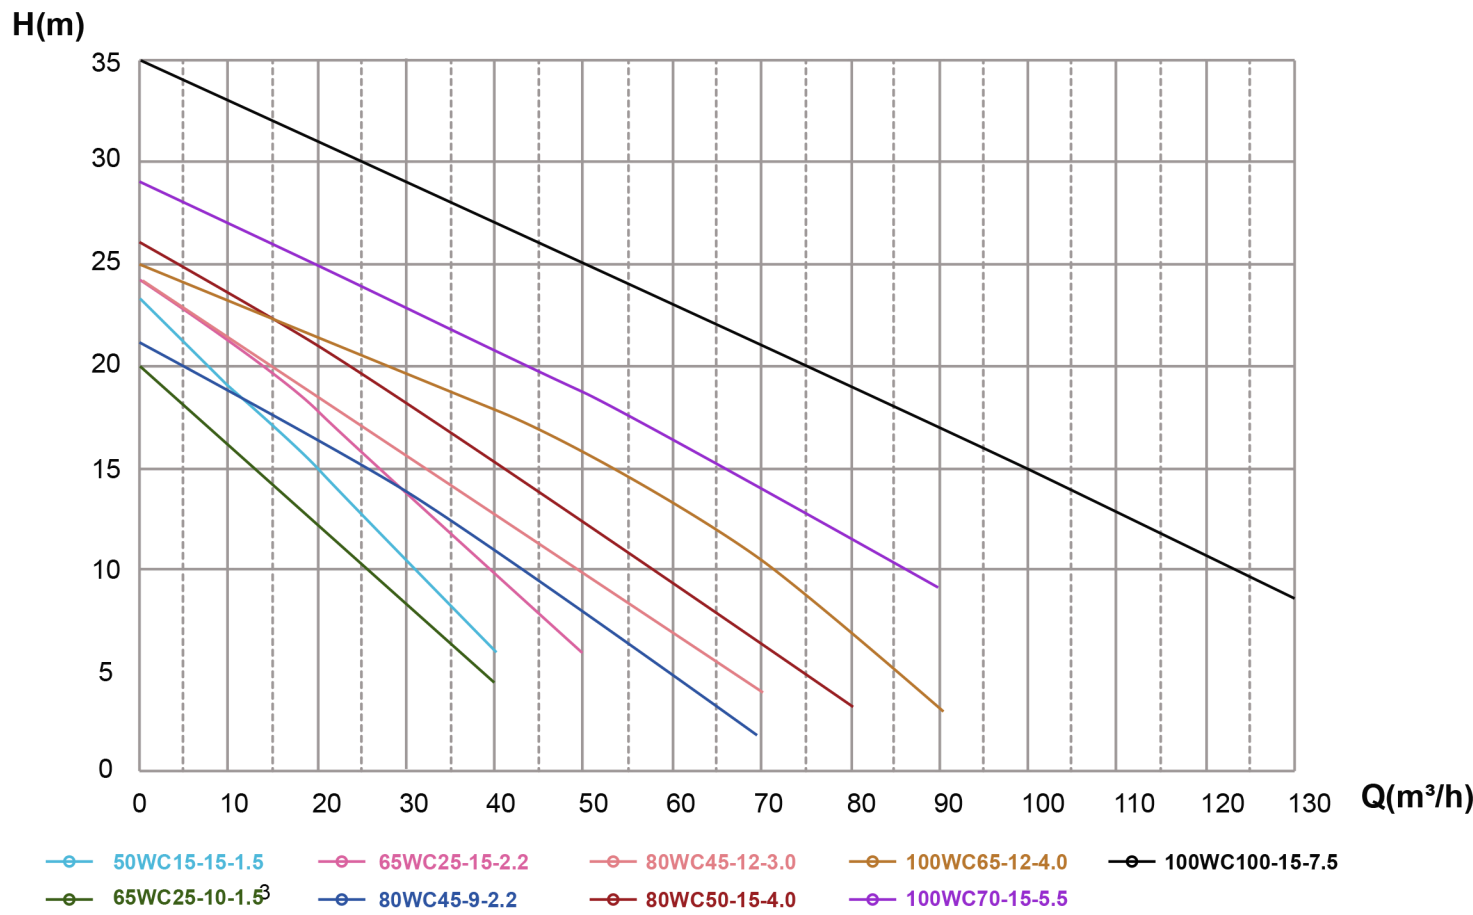

DIMENSION

Type	A (mm)	L (mm)	L2 (mm)	L1 (mm)	B (mm)	H (mm)	H1 (mm)	H2 (mm)	d (mm)	D0 (mm)	n-d0 (mm)
50WC15-15-1.5	50	237	309	122	186	453	94	378	48	110	13
50WC15-15-1.5	50	237	309	122	186	453	94	378	48	110	13
65WC25-10-1.5	65	237	352	131	212	485	111	409	62	130	13
65WC25-15-2.2	65	286	400	160	252	503	128	426	62	130	13
80WC45-9-2.2	80	286	405	160	252	503	128	426	74	150	18
80WC45-12-3.0	80	270	390	165	219	555	120	487	74	150	18
80WC50-15-4.0	80	290	410	164	253	576	139	509	74	150	18
100WC65-12-4.0	100	301	410	175	252	635	198	578	100	170	18
100WC70-15-5.5	100	310	470	170	280	645	146	575	100	170	18
100WC100-15-7.5	100	320	480	180	293	655	152	585	100	170	18

Type	Voltage (V)	Power (KW) (HP)	Q (m³/h) Q (l/min)	0	10	20	30	40	50	60	70	80	90	100	110	120	130
50WC15-15-1.5	1Ph/220V	1.5 2	H(m)	23	19	13	9	6									
50WC15-15-1.5	3Ph/380V	1.5 2		23	19	13	9	6									
65WC25-10-1.5	3Ph/380V	1.5 2		20	16	12	8	4									
65WC25-15-2.2	3Ph/380V	2.2 3		24	21	18	14	9	6								
80WC45-9-2.2	3Ph/380V	2.2 3		21	18	16	14	11	8	5	2						
80WC45-12-3.0	3Ph/380V	3 4		23	21	18	16	13	11	7	3						
80WC50-15-4.0	3Ph/380V	4 5.5		26	24	22	20	18	15	11	7	3					
100WC65-12-4.0	3Ph/380V	4 5.5		25	23	21	19	17	15	13	11	7	2.9				
100WC70-15-5.5	3Ph/380V	5.5 7.5		29	27	25	23	21	19	17	14	12.7	8.6				
100WC100-15-7.5	3Ph/380V	7.5 10		35	33	31	29	27	25	23	21	19	17	15	13	11	8