

M1/M2 Condensate Pump

- Ultra-quiet DC motor
- Electrode water level sensor
- Reliable drainage



Quiet operation



LED light display



Electrode water
level sensor



24h Automatic
drainage




Anti-leakage
& anti-short circuit


For the layout of the pump



Flow Rate

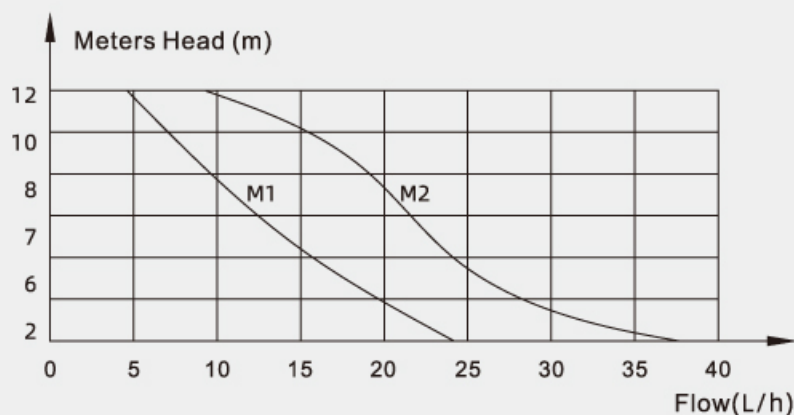

Dimensional Drawing (Unit:mm)

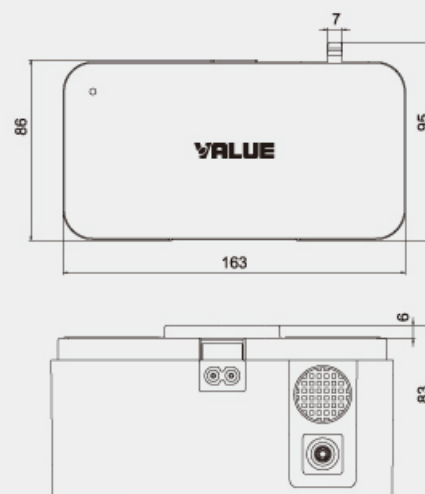

Technical Parameters

Model	M1	M2
Voltage	100-240V/50-60Hz	100-240V/50-60Hz
Discharge head (Max.)	12m / 39 ft	12m / 39 ft
Flow rate (Max.)	24L/h / 6.4 US GPH	40L/h / 10.6 US GPH
Effective water tank capacity	200ml	200ml
Unit output (Max.)	9kW / 30000btu/h	13kW / 45000btu/h
Noise at 1m	19dB(A)	21dB(A)
Applicable ambient Temperature	0°C~50°C	0°C~50°C